




## Daewoo Nubira J100/J150

### Rear fog lamp switches on of its own accord

In the case of the above-mentioned vehicles, the rear fog lamp can light up of its own accord despite actually being switched off. The remedy for the problem is to install two additional diodes (circuit diagram, Pos. A) in the white and yellow cable runs (circuit diagram, Pin 15 and E) near the rear fog lamp relay (Pos. B). Before soldering the diodes in place, which are available from Daewoo dealers, make sure that these diodes are pointing the right way (arrow in direction of current flow). Heat-shrinkable sleeving should be used for insulation.

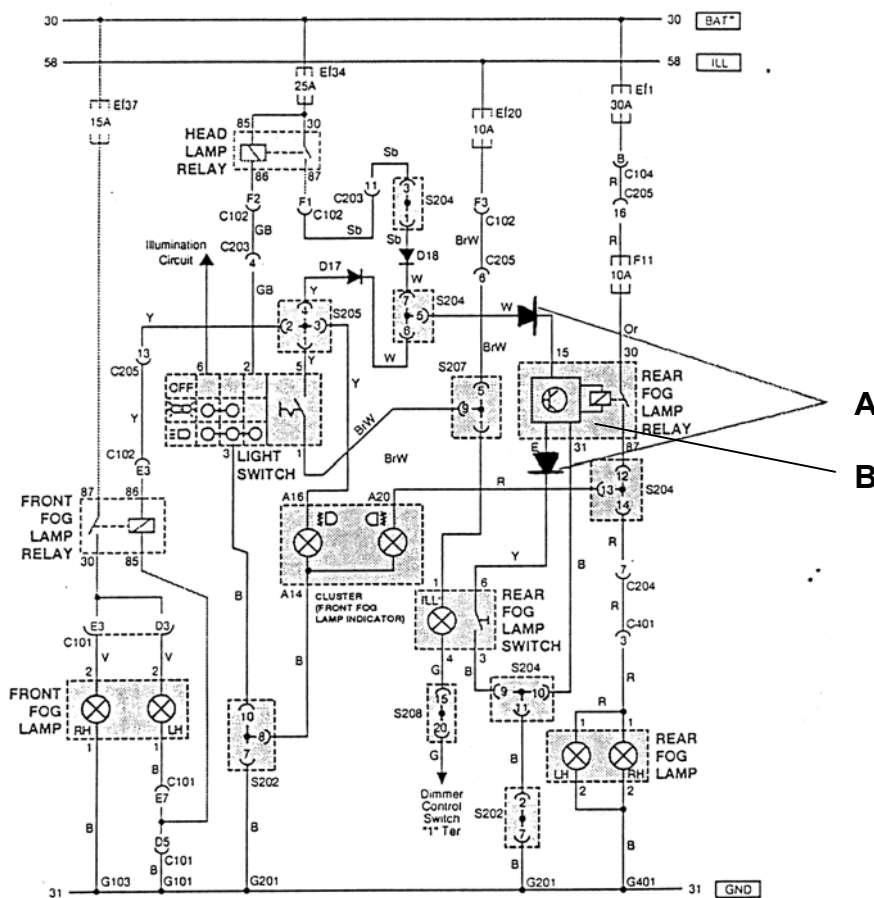

Bulletin

