


# Cooled exhaust gas recirculation

Ever more stringent emission regulations require a constant improvement in pollutant reduction methods. For diesel engines, this particularly applies to a further reduction in nitrogen oxides (NO<sub>x</sub>). Cooled exhaust gas recirculation (EGR) can play a significant role in this context. Motorservice explains the purpose and science behind this emission control system.

**T**hanks to EGR cooling, the combustion chamber temperatures are lower, as is the level of nitrogen oxide formation. Many of today's EGR coolers, feature an electrically or pneumatically switched bypass flap. The bypass flap allows the exhaust gases to be routed past the EGR cooler during the warm-up phase, so that the engine and catalytic converter achieve their operating temperature more quickly.

A further advantage is a reduction in noise generation, so-called "diesel knock", as well as in the level of raw hydrocarbon emissions in the warm-up phase. Bypassing is also possible if high exhaust gas temperatures are required, such as during regeneration of diesel particulate filters.

With gases there is a close relationship between pressure, temperature and volume. In simplified terms, heating a certain volume of gas causes it to expand; the volume decreases as the gas cools down. If the volume of the gas is restricted, as is the case for example in a cylinder, the pressure increases with increasing temperature and drops on cooling. In other words, given a fixed volume, it is possible to "get more gas in" by cooling it.

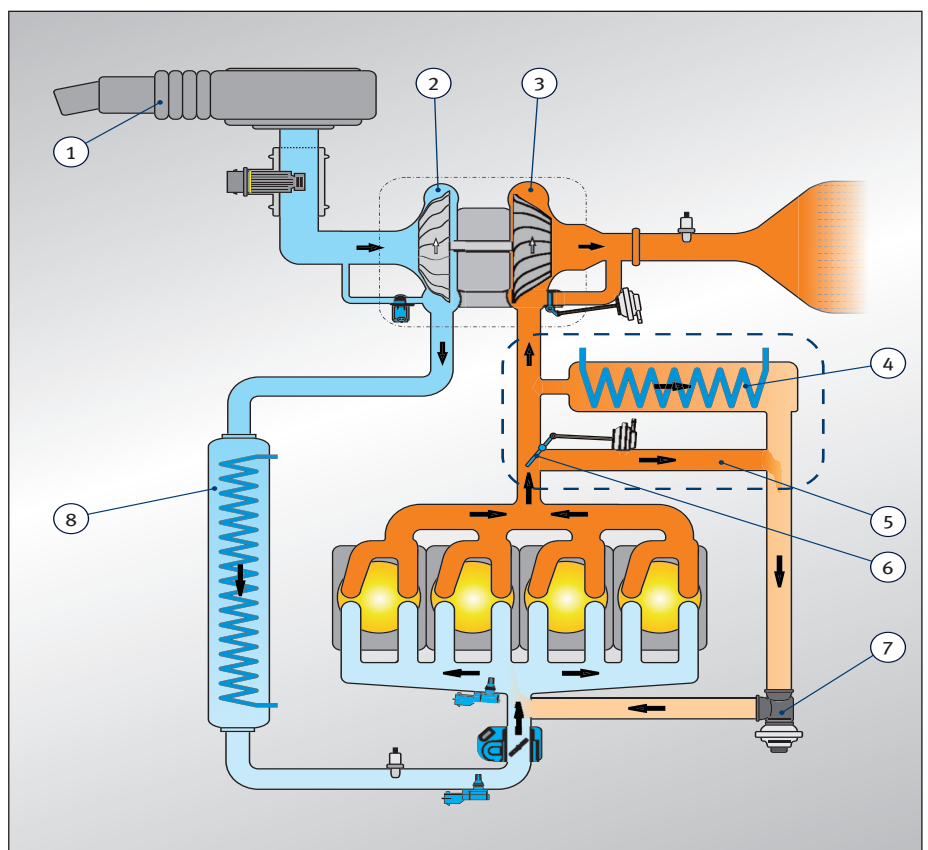

**Components of a cooled exhaust gas recirculation: 1 Air filter, 2 Turbocharger (compressor), 3 Turbocharger (turbine), 4 EGR cooler, 5 Bypass duct, 6 Bypass flap (vacuum-controlled in this case), 7 EGR valve, 8 Charge air cooler**



**A cooled EGR Valve**

Consequently, the greater the amount of exhaust gas in the cylinder charge, the lower will be the oxygen content. The exhaust gas itself is not involved in the combustion process, but can absorb large quantities of heat, due to its high thermal capacity. These two effects lower the peak combustion temperatures and reduce the combustion rate, which causes the nitrogen oxide emissions to drop.

The term "nitrogen oxides" is an umbrella term for the gaseous oxides of nitrogen. Use is made of the abbreviation NO<sub>x</sub>, as there are several compounds of nitrogen and oxygen on account of the numerous oxidation stages of nitrogen. Nitrogen oxides irritate and harm the respiratory organs, contribute towards smog and ozone formation and promote the development of acid rain.